

F&J SPECIALTY PRODUCTS, INC.
EMERGENCY RESPONSE SAMPLING SYSTEM
12VDC POWERED AIR SAMPLER
— Digital Flowmeter Technology —
F&J Model DF-AB-XCC; X=200 to 800SCCM

NOTABLE FEATURES:

- State-of-the-Art Electronics
- Operating Modes
 - Line Power (100VAC – 250VAC)
 - On-Board Batteries
 - Automobile Cigarette Lighter
- Long-lasting Nickel Metal Hydride Batteries
- Battery Charging Circuit operable from Line Power Input
- Lightweight — 13 lbs. (5,9 kg)
- Flow Range 200-800SCCM
- Bright LED Display
- Automatic Flow Control Feature
- Flowrate and Volume totalizations displayed are corrected to a factory settable Reference Temperature and Pressure (4 options available)
- Auto shut-off on time or volume
- Battery Life Indicator



GENERAL DESCRIPTION:

F&J Model DF-AB-XCC is a lightweight, small footprint, DC voltage powered air sampling system operable from (1) on-board 4500 mAh NiMH batteries, (2) line power, or (3) automobile cigarette lighter socket.

The DF-AB-XCC is well suited for emergency response sampling activities where users do not know whether line power will be available. Typical operating time from on-board batteries is greater than 8 hours utilizing 47 mm glass fiber filter paper.

The automatic flow control feature with the F&J Digital Flowmeter technology provides maximum flexibility for emergency response sampling responsibilities. The set flowrate is maintained automatically in case of dust loading and does not require operator attention.

Typical flow range is 50 – 200 SCCM to 400 – 800 SCCM.

Rev.: 29 Feb. 2016

DF-AB-XCC Battery Powered Air Sampler Specifications

Pump Type: Dual diaphragm high efficiency

Maximum Flowrate: 800 SCCM

Power Source:

Internal –

12VDC Battery Pack

NiMH; 12VDC/4500 mAh

External –

Line Power; 100VAC to 250VAC

Automobile Cigarette Lighter – 12VDC

Battery Charging System:

Internal System which charges from line Power.

Operating Time on Batteries: > 8 hours

Current Draw: 0.2 A maximum

Filter Holder Fitting: 3/8 FNPT quick disconnect

Handle: Durable plastic

Weight: 10 lbs. (4.5 kg)

Dimensions: 14.5"×8"×10" (36,8 × 20,3 × 25,4 cm)

Operating Temperature Range: 0°F to 122°F (-18°C to 50°C)

Display: Bright LED (6 character, 1,2 cm H)

Elapsed Time: DD:HH:MM up to 168 hours

Flow Control:

Adjustable from keypad set up mode

Flow Accuracy: ±4.0% of Full Scale

Factory Settable Reference T and P

Classical STP	0°C, 1 ATM
Normal T and P	20°C, 1 ATM
Modified Normal T and P	70°F, 1 ATM
Standard Ambient T and P	25°C, 1 ATM

OPTIONS:

- Data Storage Device (P/N: 232FCDS D)
- 2 GB Secure Digital Card (P/N: 372239)
- Flash card Reader (P/N: SDDR-199-A20)


Standard Combination Filter Holders Available:

FILTER HOLDER MODEL	CHARCOAL CARTRIDGE DIMENSIONS	PARTICULATE PAPER DIAMETER
FJ-05P	F&J Model B	2" or 50 mm
FJ-21P	F&J Model C	2" or 50 mm
FJ-35P	F&J Model B	47 mm
FJ-46P	F&J Model C	47 mm
FJ-51P	F&J Model M	2" or 50 mm
FJ-53P	F&J Model M	47 mm

Available Engineering Units for Flow and Volume:

sccm/scc

Digital Flowmeter Keypad/Display

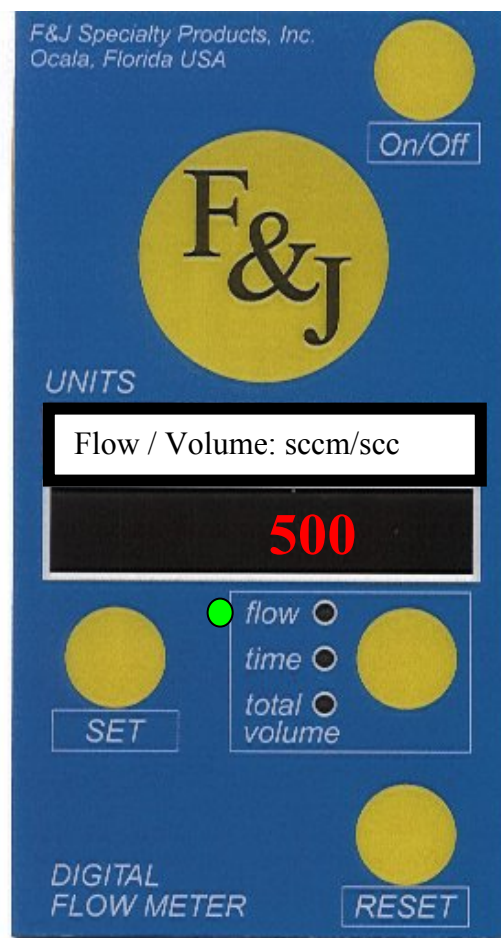

F&J SPECIALTY PRODUCTS, INC.

Tel: 352/680-1177 • Fax: 352/680-1454 • Email: fandj@fjspecialty.com