

F&J SPECIALTY PRODUCTS, INC.

The Nucleus of Quality Air Monitoring Programs

COMPACT DIGITAL AIR FLOW CALIBRATOR for AIR SAMPLERS

The most flexible calibrator design available for laboratory or field use. Mobile venturi tube feature eliminates difficult set up positions during calibrations.

NOTABLE FEATURES:

- Differential Pressure Flow Sensor
- Display of flow in CFM, LPM or M³/min. by operator selection (LED display)
- Standard accuracy: ±2.0% Full Scale
- Flowrates displayed are corrected to a factory settable Reference Temperature and Pressure (4 options available)

Classical STP	0°C, 1 Atm
Normal T and P	20°C, 1 Atm
Modified Normal T and P	70°F, 1 Atm
Standard Ambient T and P	25°C, 1 Atm
- Display of barometric pressure in metric or English units
- Display of temperature in metric or English units
- Certified to UL, CSA and CE electrical safety standards
- NIST traceable calibration certificate
- Ambient or Reference flow is selectable by the operator
- 2 year warranty



Models Available

Basic Line Power Models and Units with Battery Option

110–120VAC	110V+Battery Option	220–240VAC	220V+Battery Option	Air Flow Range	
<u>MODEL NO.</u>	<u>MODEL NO.</u>	<u>MODEL NO.</u>	<u>MODEL NO.</u>	<u>CFM</u>	<u>LPM</u>
CD-801V.2	CD-801BV.2	CD-801EV.2	CD-801BEV.2	0.1 – 1	3 – 30
CD-802V.2	CD-802BV.2	CD-802EV.2	CD-802BEV.2	0.2 – 2	6 – 56
CD-812V.2	CD-812BV.2	CD-812EV.2	CD-812BEV.2	0.5 – 4	14 – 115
CD-828V.2	CD-828BV.2	CD-828EV.2	CD-828BEV.2	1 – 9	28 – 250
CD-814V.2	CD-814BV.2	CD-814EV.2	CD-814BEV.2	2 - 14	56 - 400
CD-530V.2	CD-530BV.2	CD-530EV.2	CD-530BEV.2	5 – 30	140 – 850
CD-540V.2	CD-540BV.2	CD-540EV.2	CD-540BEV.2	5 – 40	140 – 1130
CD-550V.2	CD-550BV.2	CD-550EV.2	CD-550BEV.2	5 – 50	140 – 1400
CD-870V.2	CD-870BV.2	CD-870EV.2	CD-870BEV.2	10 – 70	280 - 1980

Options:

- 1% F.S. accuracy units available (add '-1' to model number); example: CD-812E-1

COMPACT DIGITAL AIR FLOW CALIBRATOR V.2

1. MEASUREMENT PRINCIPLE

- 1.1 Flow Sensor: Differential Pressure Sensor
 - 1.2 Standardization: Correction for standard temperature and barometric pressure
 - 1.3 Curve linearization: Individually calibrated and software corrected
-

2. MEASUREMENT RANGES

- 2.1 Air flow: See Table on front page
 - 2.2 Temperature: $-4^{\circ} - 122^{\circ} \text{ F}$ ($-20^{\circ} - 50^{\circ} \text{ C}$)
 - 2.3 Barometric pressure: 30 – 24 In-Hg (760 – 609 mm-Hg)
approx. Sea level to 6000 ft. elevation above sea level
-

3. MEASUREMENT ACCURACY

- 3.1 Air flow: $\pm 2\%$ of full scale (Optional $\pm 1\%$ of full scale)
 - 3.2 Temperature (Typical): 1°C over range -20°C to 50°C
 - 3.3 Barometric pressure: $\pm 1\%$ of reading over measurement range of 22.00-30.00 “Hg
-

4. DISPLAY 6 Digit LED 0.4” high

5. DISPLAYED PARAMETERS and RESOLUTIONS

	Parameter	Engineering Unit	Resolution	
5.1	CFM	Cubic feet per minute	0.01	CFM
5.2	LPM	Liter per minute	.1 or 1	LPM
5.3	M ³ /m	Cubic meter per minute	0.0001	M ³ /min
5.4	F	Degree Fahrenheit	0.1	Degree F
5.5	C	Degree Celsius	0.1	Degree C
5.6	In-Hg	Inches of Mercury	0.01	In-Hg
5.7	mm-Hg	Millimeters of Mercury	1	mm-Hg

6. GENERAL

- 6.1 Power requirements: 100–120 VAC;50/60Hz 0.3 Amps max; 220-240 VAC/50Hz
 - 6.2 Operating temperature: $-4^{\circ}\text{F} - 122^{\circ}\text{F}$ ($-20^{\circ}\text{C} - 50^{\circ}\text{C}$)
 - 6.3 Storage temperature: $-20^{\circ}\text{F} - 158^{\circ}\text{F}$ ($-29^{\circ}\text{C} - 70^{\circ}\text{C}$)
 - 6.4 Dimension (L×W×H) 8.625”×3.75”×8.375” (219×95.25×213mm)
 - 6.5 Weight: 8 lbs. 6 oz. (3.8 Kgs.)
 - 6.6 Installation Category: Pollution Degree 2
 - 6.7 Enclosure Rating: IPXO
-

7. CALIBRATION

Factory calibration is recommended once per year

8. OPTIONS

- 8.1 RS-232 cable — All measured and calculated parameters are accessible through the RS-232 port to a computer.
- 8.2 Data acquisition and processing software is available upon request.
- 8.3 1% F.S. accuracy units are available.
- 8.4 Battery operable option with on-board charging system

CALIBRATION SETUP ILLUSTRATIONS




**Calibration Setup for High Volume Air Sampler
with 8"×10" Filter Holder**



**Calibration Setup for Portable
High Volume Air Sampler
with 4" (102mm) D Filter Holder**



**Rear View Illustrating Support
Mechanism**

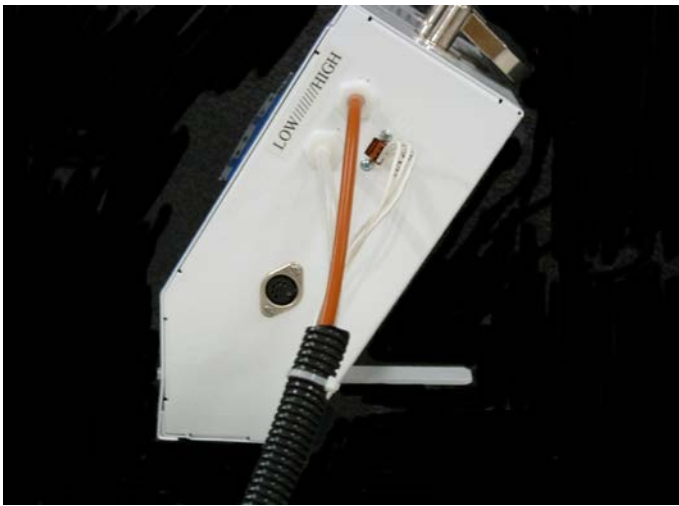

**Side View of Calibrator
Illustrating RS232 Port**



**Calibration Setup for F&J's Digital
High Volume Air Sampler;
Model DH-604V.2**



**Calibration Setup for Portable
Low Volume Air Sampler
with Small Diameter Filter Holder**