

F&J SPECIALTY PRODUCTS, INC.

Low Flow AC/DC POWERED AIR SAMPLER

— Digital Flowmeter Technology —
F&J Model DF-5L-BL-AC

NOTABLE FEATURES:

- State-of-the-Art Electronics
- Operating Modes
 - Line Power (100VAC – 250VAC)
 - External 12VDC Source
- Lightweight — ~5.5 lbs. (2.5 kg)
- High Flow — 5 LPM Maximum
- Bright LED Display
- Automatic Flow Control Feature
- Flowrate and Volume totalizations displayed are corrected to a factory settable reference Temperature and Pressure (4 options available)
- Auto shut-off on time or volume



GENERAL DESCRIPTION:

F&J Model DF-5L-BL-AC is a lightweight, small footprint, DC voltage powered air sampling system operable from (1) line power, or (2) a 12 VDC power source such as solar panels or other alternative energy sources.

The DF-5L-BL-AC is well suited for alternative energy air sampling activities where users do not know whether line power will be available. The unit may be operated from solar power or wind power source through either the AC input or DC input.

The automatic flow control feature with the F&J Digital Flowmeter technology provides maximum flexibility for emergency response sampling responsibilities. The set flowrate is maintained automatically in case of dust loading and does not require operator attention.

Typical flow range is 1-5 SLPM (1000 -5000 sccm).

Rev.: 29 Feb. 2016

DF-5L-BL-AC AC/DC Powered Air Sampler Specifications

Pump Type: Diaphragm; high efficiency

Motor Type: 12VDC PWM

Maximum Flowrate: 5 LPM

Power Source:

Line Power; 100VAC to 250VAC

External 12VDC Source

Fuse Protection: 2A

Current Draw: 1 A maximum

Filter Holder Fitting: 3/8 FNPT quick disconnect

Handle: Durable metal

Weight: 5.5 lbs. (2.5 kg)

Dimensions: 9"×10"×10" (23 × 25 × 25 cm)

Operating Temperature: 0°F to 122°F
(-18°C to 50°C)

Display: Bright LED (6 character, 1,2 cm H)

Elapsed Time: DD:HH:MM up to 168 hours

Flow Control:

Adjustable from keypad between 1-5 LPM

Flow Accuracy: ± 4.0% of Full Scale

Factory Settable Reference T and P

Classical STP 0°C, 1 ATM

Normal T and P 20°C, 1 ATM

Modified Normal T and P 70°F, 1 ATM

Standard Ambient T and P 25°C, 1 ATM

OPTIONS:

- Data Storage Device (P/N: 232FCDS)
- 2 GB Secure Digital Card (P/N: 372239)
- Flash card Reader (P/N: SDDR-199-A20)


Standard Combination Filter Holders Available:

FILTER HOLDER MODEL	CHARCOAL CARTRIDGE DIMENSIONS	PARTICULATE PAPER DIAMETER
FJ-05P	F&J Model B	2" or 50 mm
FJ-21P	F&J Model C	2" or 50 mm
FJ-35P	F&J Model B	47 mm
FJ-46P	F&J Model C	47 mm
FJ-51P	F&J Model M	2" or 50 mm
FJ-53P	F&J Model M	47 mm

Available Engineering Units for Flow and Volume:

sccm/scc
SLPM / SLP
SCFM / SCF

Digital Flowmeter Keypad/Display

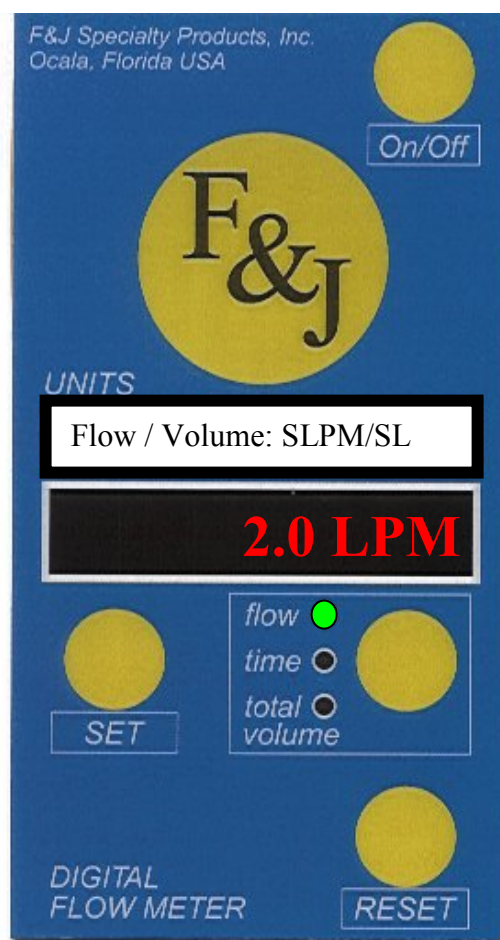

F&J SPECIALTY PRODUCTS, INC.

Tel: 352/680-1177 • Fax: 352/680-1454 • Email: fandj@fjspecialty.com