

F&J SPECIALTY PRODUCTS, INC.

The Nucleus of Quality Air Monitoring Programs

MOBILE LOW VOLUME AIR SAMPLER MODEL SRS-28BMHT



NOTABLE FEATURES:

- Constant air flow regulator adjustable
- Easy access powder coat painted enclosure with exhaust fan
- Durable 1/4 HP oil-less carbon vane pump designed for continuous use
- Internal intake and exhaust mufflers
- Rotometer, flow measurement system
- Heavy-duty hand truck with 10.5" pneumatic tires
- Weather resistant designed for outdoor use
- Pressure gauge
- Pressure needle valve for easy calibration verification
- GFCI Protection
- Card Mounted Filter Holder
- 100-120VAC, 50/60Hz; single phase

GENERAL DESCRIPTION:

The Model SRS-28BMHT heavy duty hand truck mounted mobile low volume air sampler designed for outdoor use with an adjustable, aluminum sampling gooseneck. The adjustable gooseneck permits sampling at heights varying from 4' to 7' above floor level. Model SRS-28BMHT contains a standard rotameter for flow measurements. The air sampler is contained in a powder coat painted environmental enclosure mounted ~ 4 inches above ground level.

Model SRS-28BMHT includes GFCI protection and the card mounted filter holder with a quick disconnect fitting.

The SRS-28BMHT Air Sampler includes an oil-less, carbon vane vacuum pump with a constant airflow regulator for use where a nearly constant airflow is desirable. The regulator holds a constant pressure drop across an in-line orifice by varying the flow through a bypass valve into the pump. This system allows the pump to work at a minimum pressure drop at all times, permitting it to run cooler, thus extending its lifetime. The oil-less pump requires no lubrication to maintain optimal efficiency during its service life. The pump is mounted on a rugged mobile hand truck with two 10.5" diameter pneumatic tires to facilitate mobile transportation of the unit.

The SRS-28BMHT is designed for continuous indoor or outdoor use. Please consult the product specifications for the design temperature range and the installation category.

Rev.: 06 October 2017

SRS-28BMHT LOW VOLUME AIR SAMPLER (100-120VAC)

Mobile Unit with Adjustable Sampling Height

SPECIFICATIONS:

PUMP TYPE: Oil-less, carbon vane 1/4 HP, 1725 RPM @ 60 Hz

MAXIMUM CAPACITY:

35 CFM (100 LPM) at 0" Hg Pressure drop

ULTIMATE VACUUM: 25" (635 mm) Hg at sea level

POWER REQUIREMENTS: 100 – 120VAC, 50/60 Hz; 10 amperes; single phase

CIRCUIT BREAKER PROTECTION: 10 amperes

ELECTRICAL CORD: All temperature, 3 wire, 14 gauge

THERMAL OVERLOAD PROTECTION: Furnished as an integral part of the motor

CONSTANT AIRFLOW REGULATOR: Aluminum construction with silicone diaphragm; adjustable from 0.5 to 35 CFM (10-100 LPM)

DIMENSIONS: 24"L × 21"W × 55"H
(61cm × 53 cm × 140 cm)

SAMPLING GOOSENECK: Adjustable from 4' to 7' (121 cm to 213 cm) sturdy aluminum

WHEELS: 10.5"D, pneumatic tires

WEIGHT: 80 lbs. (36 kg)

INSTALLATION CATEGORY: Pollution Degree 3

OPERATING TEMPERATURE RANGE: 20° to 122°F (-7° to 50°C)

CALIBRATION: Calibration verification 1 per year

COMMUNICATIONS INTERFACE: RS-232

COUNTER-TOP CABINET FEATURES



- Two handles
- Exhaust fan; 100 CFM
- Easy-open maintenance door
- Removable top
- Multi-louvered sides

CARD MOUNTED FILTER HOLDER:



PUMP CURVE

Top line on curve is for 60-cycle performance
Bottom line on curve is for 50-cycle performance

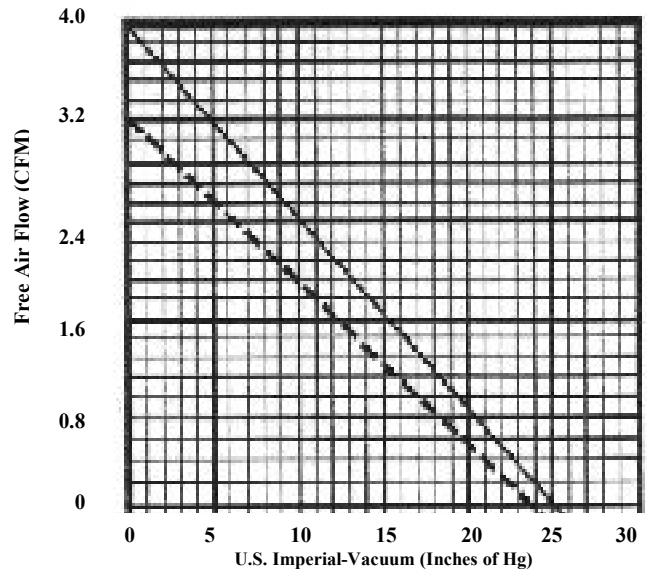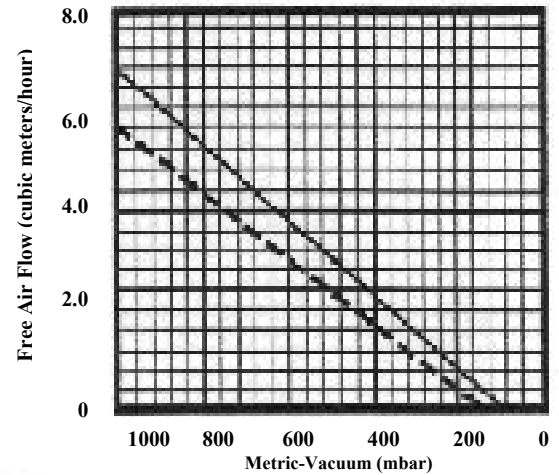

**CONSTANT AIR FLOW REGULATOR CURVE
TYPICAL PUMP OPERATING FLOW RANGE**

